



Molex Headers	Molex p/n	Digikey p/n
9 Pin	22-01-2095	WM2619-ND
6 Pin	22-01-2065	WM2616-ND
4 Pin	22-01-2046	0022012046-ND
2 Pin	22-01-2025	WM2613-ND
Crimp Terminal	08-55-0111	WM2624-ND
Crimper		WM9999-ND

Phoenix Contact Headers	Phoenix p/n	Digikey p/n
9 Pin	1881396	277-1437-ND
6 Pin	1881367	277-1434-ND
8 Pin	1881383	277-1436-ND
2 Pin	1803578	277-1161-ND

Multiplexer has an inbuilt RS232 to RS485 converter.
Local and Remote boards do not have to be the same serial protocol.
All serial channels are transparent to baud rate. 230,400 bps Max

Serial Channels 3 & 4 RS232/485 Jumper Configuration

	Jumper JP1	Jumper JP2	Jumper JP3
Serial 3 RS232			N/A
Serial 3 RS485		N/A	
Serial 4 RS232			N/A
Serial 4 RS485		N/A	

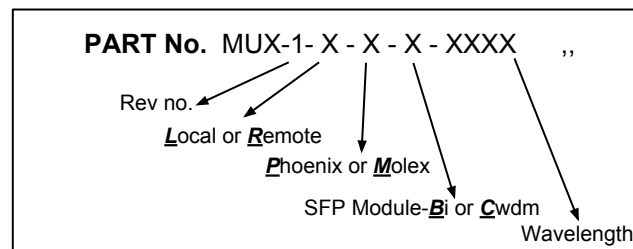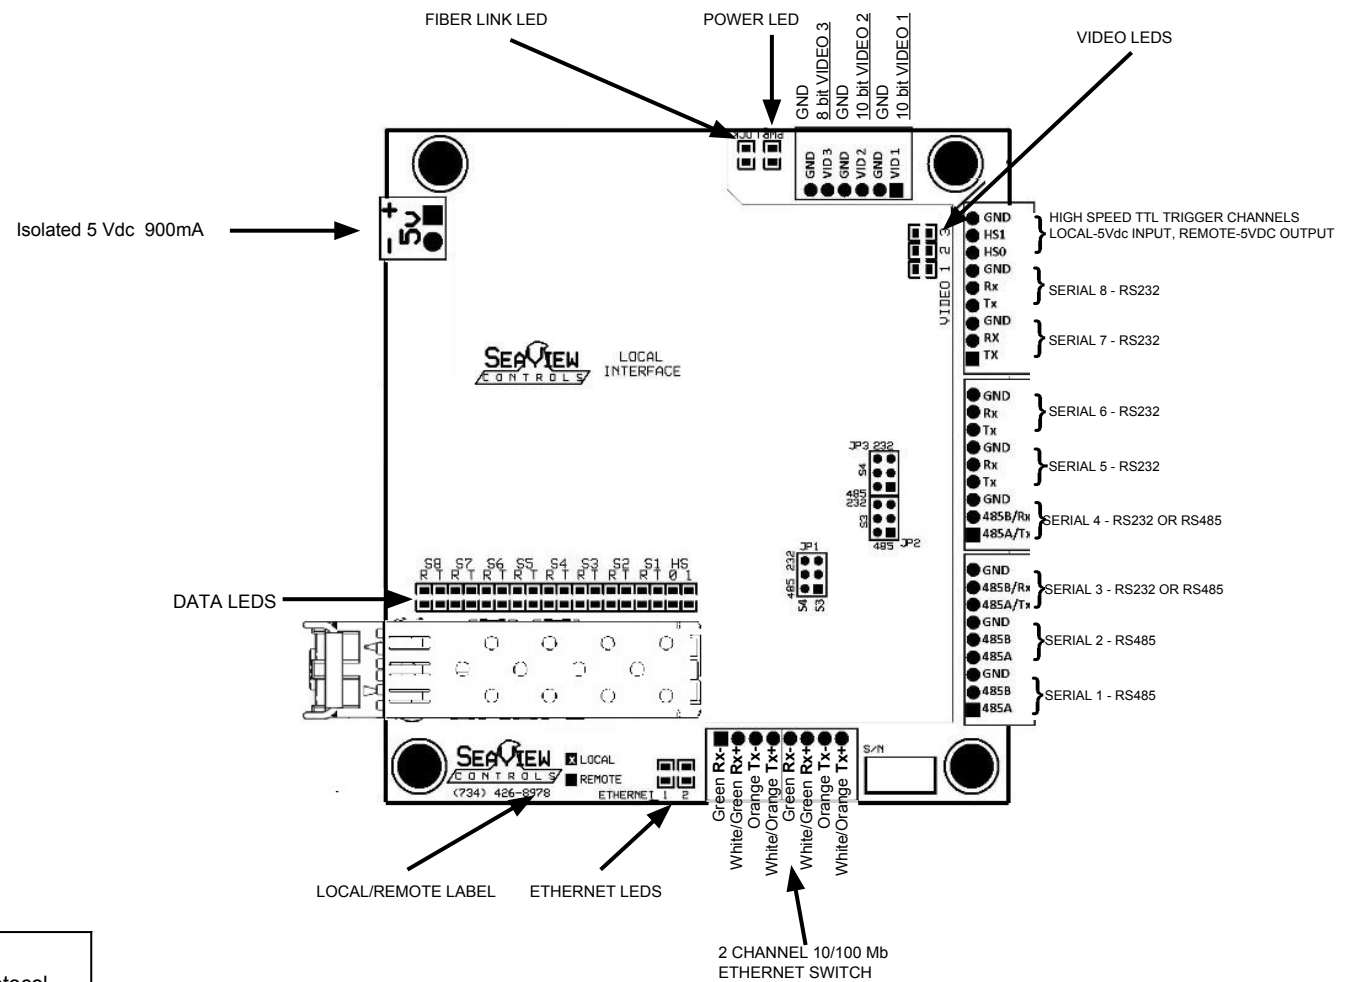

	7275 Joy Rd, Dexter, MI USA +1 734-426-8978 www.seaviewsystems.com
SVS-109 Video and Data Fiber Multiplexer	
Sheet 1 of 1	
Date: 23 Oct 2014	Dwg no: MUX-Rev2